



DH (DHS) WIPER SEAL

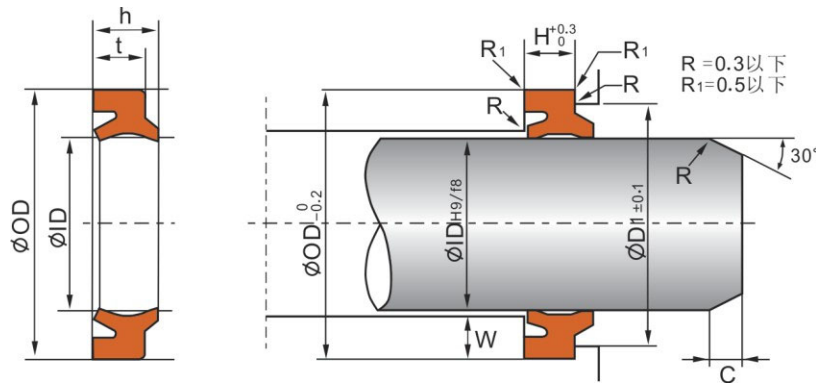

APPLICATION	
MATERIAL	PU
TEMP.	-35°C~100°C
SPEED	1 m/s

ITEM	ID	OD	t	h	D1	H	C	W
DH-011.2	11.2	19.2	4.5	6	15.5	5	2	4
DH-012	12	20	3.8	5.5				
DH-014	14	22	4.5	6	18.3	5	2	4
DH-016	16	24	4.5	6	20.3	5	2	4
DH-018	18	26	4.5	6	22.3	5	2	4
DH-020	20	28	4.5	6	24.3	5	2	4
DH-022	22	30	4.5	6	26.3	5	2	4
* DH-022	22	31	3.7	7.6				
DH-022.4	22.4	30.4	4.5	6	26.7	5	2	4
DH-023.5	23.5	31.5	4.5	6	27.8	5	2	4
DH-025	25	33	4.5	6	29.3	5	2	4
DH-028	28	36	4.5	6	32.3	5	2	4
DH-030	30	38	5	6.5	34	6	2	4
DH-031.5	31.5	39.5	5	6.5	35.5	6	2	4
DH-032	32	40	5	6.5	36	6	2	4
DH-035	35	43	5	6.5	39	6	2	4
DH-035.5	35.5	43.5	5	6.5	39.5	6	2	4
DH-036	36	44	4.5	6				
DH-036	36	44	5	8				
DH-038	38	46	5	6.5	42	6	2	4
DH-040	40	48	5	6.5	44	6	2	4
DH-045	45	53	5	6.5	49	6	2	4
DH-045	45	53	4.7	5.8				
DH-045	45	53	4.7	7.2				
DH-050	50	58	4.7	5.8				
DH-050	50	58	5	6.5	54	6	2	4
DH-053	53	61	5	6.5	57	6	2	4
DH-055	55	63	5	6.5	59	6	2	4
DH-056	56	64	5	6.5	60	6	2	4
DH-060	60	68	5	6.5	64	6	2	4
* DH-060	60	70	5.3	6.8				
DH-063	63	71	5	6.5	67	6	2	4
DH-065	65	73	5	6.5	69	6	2	4
DH-067	67	75	5	6.5	71	6	2	4

DH (DHS) WIPER SEAL

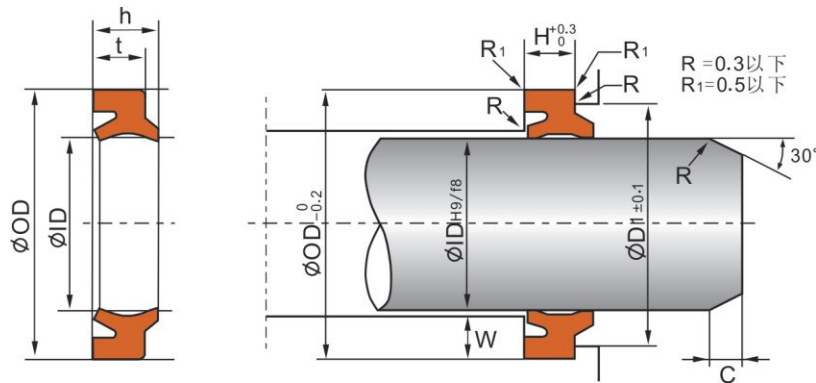

APPLICATION	
MATERIAL	PU
TEMP.	-35°C~100°C
SPEED	1 m/s

ITEM	ID	OD	t	h	D1	H	C	W
DH-070	70	80	6	8	75	7	3	5
DH-071	71	81	6	8	76	7	3	5
DH-075	75	85	6	8	80	7	3	5
DH-080	80	90	6	8	85	7	3	5
DH-085	85	95	6	8	90	7	3	5
DH-090	90	100	6	8	95	7	3	5
DH-098	98	108	6	8	103	7	3	5
DH-100	100	110	6	8	105	7	3	5
* DH-105	105	115	5	8.5				
DH-112	112	122	6	8	117	7	3	5
DH-125	125	138	7	9.5	132	8	3	6.5
DH-130	130	143	7	9.5				
DH-136	136	149	7	9.5	143	8	3	6.5
DH-140	140	153	7	9.5	147	8	3	6.5
DH-145	145	158	7	9.5	152	8	3	6.5
DH-150	150	163	7	9.5				
DH-160	160	174	7	9.5	167	8	3	7
DH-165	165	179	7	9.5	172	8	3	7
DH-180	180	194	7	9.5	187	8	3	7
DH-200	200	214	7	9.5	207	8	3	7
DH-204	204	218	7	9.5	211	8	3	7
DH-230	230	244	7	9.5	237	8	3	7