


SCK (DC2) WIPER SEAL

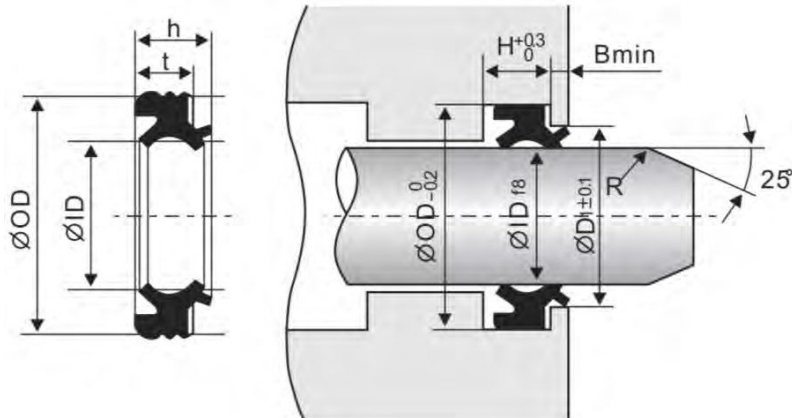

APPLICATION	
MATERIAL	NBR
TEMP.	-40°C~100°C
SPEED	1m/s

ITEM	ID	OD	t	h	D1	H	B
DC2-018	18	30	5.8	7.7	24	6	3
DC2-020	20	32	5.8	7.7	26	6	2.5
DC2-025	25	37	5.8	7.7	31	6	2.5
DC2-028	28	40	5.8	7.7	34	6	2.5
DC2-030	30	42	5.8	7.7	36	6	2.5
DC2-035	35	47	6.8	8.7	41	7	2.5
DC2-040	40	52	6.8	8.7	46	7	2.5
DC2-045	45	57	6.8	8.7	51	7	2.5
DC2-050	50	62	6.8	8.7	56	7	3
DC2-055	55	69	7.7	10	62	8	3
DC2-060	60	74	7.7	10	67	8	3
DC2-065	65	79	7.7	10	72	8	3
DC2-070	70	84	7.7	10	77	8	3
DC2-075	75	89	7.7	10	82	8	3
DC2-080	80	94	7.7	10	87	8	3
DC2-085	85	99	7.7	10	92	8	3
DC2-090	90	104	7.7	10	97	8	3
DC2-095	95	109	7.7	10	102	8	3
DC2-100	100	114	7.7	10	107	8	3
DC2-105	105	121	8.7	12	113	9	4
DC2-110	110	126	8.7	12	118	9	4
DC2-115	115	131	8.7	12	123	9	4
DC2-120	120	136	8.7	12	128	9	4