



PTU PISTON SEAL

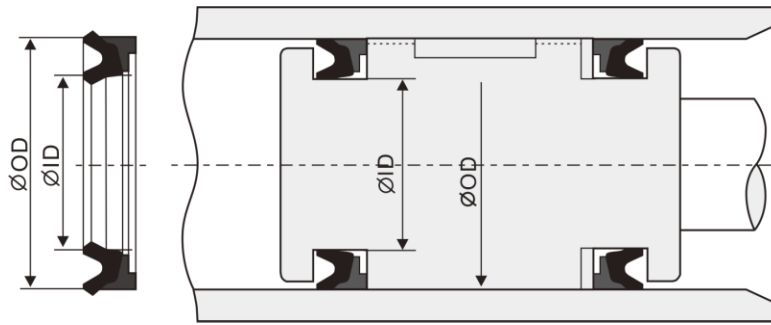

APPLICATION	
MATERIAL	PU+NY
TEMP.	-40°C~110°C
PRESSURE	350kgf/cm ²
SPEED	1 m/s

ITEM	OD	ID	h
* PTU-045	45	27	12
* PTU-050	50	32	12
* PTU-055	55	37	12.1
* PTU-060	60	42	12.1
* PTU-065	65	47	12.1
* PTU-070	70	48	14.5
* PTU-080	80	58	14.5
* PTU-090	90	68	14.5
* PTU-100	100	78	14.5
PTU-110	110	88	14.5
* PTU-115	115	93	14.5
PTU-120	120	98	14.5
PTU-125	125	103	14.5
PTU-130	130	108	14.5
* PTU-140	140	118	14.5
* PTU-150	150	128	14.5
* PTU-160	160	138	14.5
* PTU-170	170	148	14.5
* PTU-190	190	168	14.5
* PTU-200	200	178	14.5

PTU PISTON SEAL

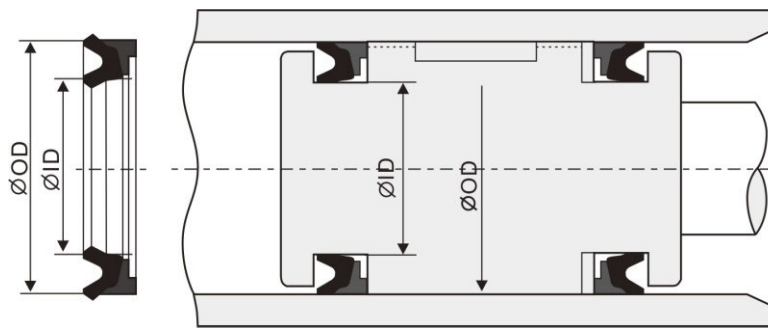

APPLICATION	
MATERIAL	NY+NBR
TEMP.	-35°C~110°C
PRESSURE	350kgf/cm ²
SPEED	1 m/s

ITEM	OD	ID	h
PTU-045	45	27	12
PTU-050	50	32	12
PTU-055	55	37	12.1
* PTU-060	60	42	12.1
* PTU-065	65	47	12.1
* PTU-070	70	48	14.5
* PTU-080	80	58	14.5
* PTU-090	90	68	14.5
* PTU-100	100	78	14.5
* PTU-110	110	88	14.5
* PTU-115	115	93	14.5
* PTU-120	120	98	14.5
* PTU-125	125	103	14.5
* PTU-130	130	108	14.5
* PTU-140	140	118	14.5
* PTU-150	150	128	14.5
* PTU-160	160	138	14.5
* PTU-170	170	148	14.5
* PTU-190	190	168	14.5
* PTU-200	200	178	14.5