



SPG (TG) PISTON SEAL

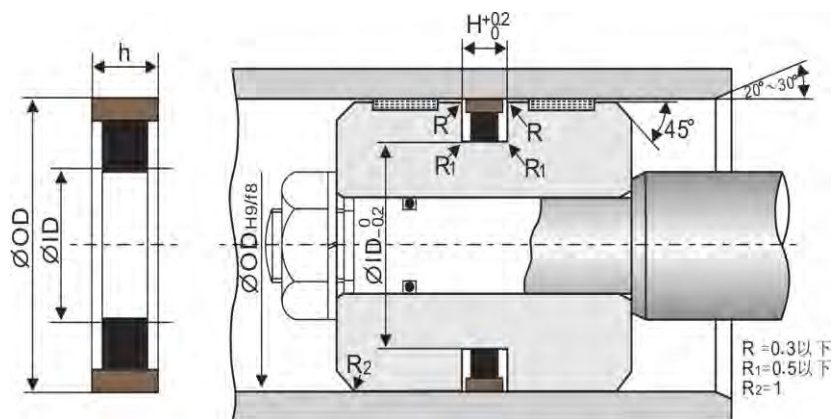

APPLICATION	
MATERIAL	PTFE+NBR
TEMP.	-40°C~110°C
PRESSURE	350kgf/cm ²
SPEED	1.5m/s

ITEM	OD	ID	h	H
SPG-025	25	17.5	3.2	
SPG-035	35	25.5	4.3	4.5
SPG-040	40	30	4.3	4.5
SPG-045	45	34	4.8	5
SPG-045	45	35	4.3	4.5
SPG-050	50	39	4.8	5
SPG-050	50	40	4.3	4.5
SPG-055	55	45	4.3	4.5
SPG-060	60	49	4.8	5
SPG-060	60	50	4.3	4.5
SPG-063	63	48	7.3	7.5
SPG-065	65	50	7.3	7.5
SPG-065	65	55	4.3	4.5
SPG-070	70	55	7.3	7.5
SPG-070	70	59	4.8	5
SPG-075	75	60	7.3	7.5
SPG-080	80	65	7.3	7.5
SPG-080	80	69	4.8	5
SPG-085	85	70	7.3	7.5
SPG-090	90	75	7.3	7.5
SPG-090	90	79	5.8	6
SPG-095	95	80	7.3	7.5
SPG-100	100	85	5.8	6
SPG-100	100	85	7.3	7.5
SPG-110	110	94	5.8	6
SPG-110	110	94	7.3	7.5
SPG-112	112	96	7.3	7.5
SPG-115	115	99	7.3	7.5
SPG-120	120	104	7.3	7.5
SPG-125	125	109	7.3	7.5
SPG-130	130	114	7.3	7.5
SPG-140	140	122	7.7	8
SPG-140	140	124	7.3	7.5

SPG (TG) PISTON SEAL

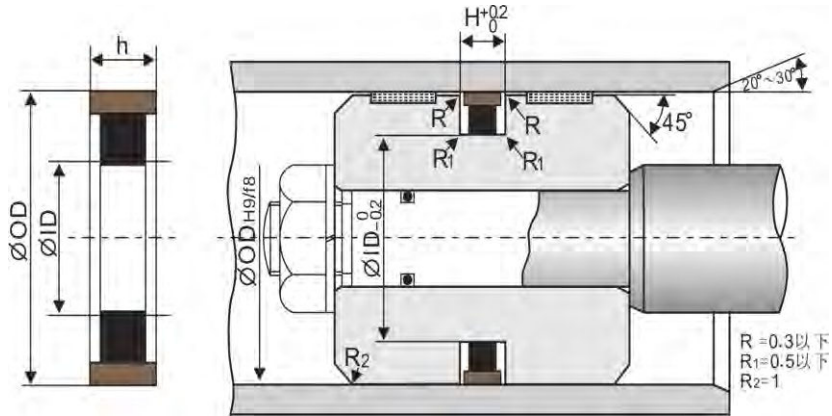

APPLICATION	
MATERIAL	PTFE+NBR
TEMP.	-40°C~110°C
PRESSURE	350kgf/cm ²
SPEED	1.5m/s

ITEM	OD	ID	h	H
SPG-150	150	134	7.3	7.5
SPG-160	160	144	7.3	7.5
SPG-170	170	148	10.8	11
SPG-180	180	158	10.8	11
SPG-190	190	168	10.8	11
SPG-200	200	178	10.8	11