


SPGA (TGA) PISTON SEAL

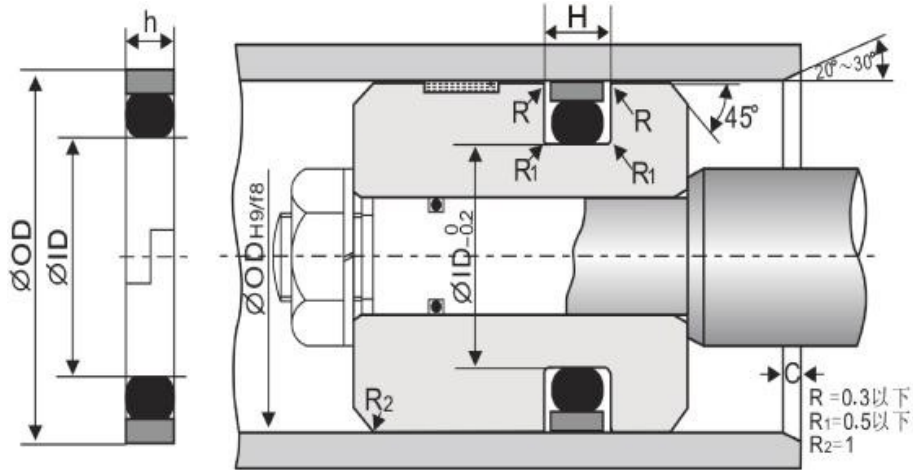

APPLICATION	
MATERIAL	NY+NBR
TEMP.	-35°C~110°C
PRESSURE	350kgf/cm ²
SPEED	1.5m/s

UNIT:MM

R = 0.3以下
R₁ = 0.5以下
R₂ = 1

ITEM	OD(mm)	ID	H(mm)
9X7298	100		7.24
9X7301	110		7.24
9X3589	115		7.24
9X3592	120		7.24
9X3595	130		7.24
2371934	135		7.24
9X3598	140		9.63
9X3601	150		9.63
9X3604	160		9.63
9X3607	170		9.63
9X3610	180		9.63
9X3609	190		9.63
8C9179	200		9.63
1723918	210		9.63
8C9182	220		9.63
2066955	230		