



# SPGW (SPGW2) PISTON SEAL

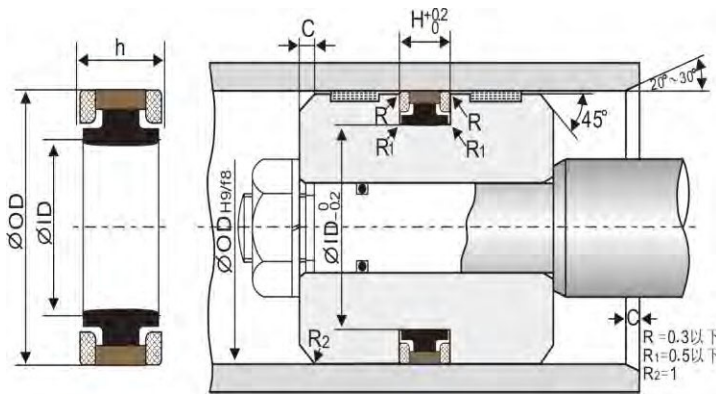

APPLICATION	
MATERIAL	PTFE+NY+NBR
TEMP.	-40°C~110°C
PRESSURE	500kgf/cm <sup>2</sup>
SPEED	1.5m/s

ITEM	OD	ID	h	H	C
SPGW-050	50	36	8.5	9	4
SPGW-055	55	41	8.5	9	4
SPGW-060	60	46	8.5	9	4
SPGW-065	65	51	8.5	9	4
SPGW-065	65	50	10.5	11	5
SPGW-070	70	55	10.5	11	5
SPGW-075	75	60	10.5	11	5
SPGW-080	80	65	10.5	11	5
SPGW-085	85	70	10.5	11	5
SPGW-090	90	75	10.5	11	5
SPGW-095	95	80	10.5	11	5
SPGW-080	80	65	12	12.5	5
SPGW-090	90	75	12	12.5	5
SPGW-100	100	85	12	12.5	5
SPGW-105	105	90	12	12.5	5
SPGW-110	110	95	12	12.5	5
SPGW-115	115	100	12	12.5	5
SPGW-120	120	105	12	12.5	5
SPGW-125	125	102	15.5	16	6.5
SPGW-130	130	107	15.5	16	6.5
SPGW-135	135	112	15.5	16	6.5
SPGW-140	140	117	15.5	16	6.5
SPGW-145	145	122	15.5	16	6.5
SPGW-150	150	127	15.5	16	6.5
SPGW-155	155	132	15.5	16	6.5
SPGW-160	160	137	15.5	16	6.5
SPGW-165	165	142	15.5	16	6.5
SPGW-170	170	147	15.5	16	6.5
SPGW-180	180	157	15.5	16	6.5
SPGW-185	185	162	15.5	16	6.5
SPGW-190	190	167	15.5	16	6.5
SPGW-200	200	177	15.5	16	6.5
* SPGW-210	210	187	15.5	16	6.5

# SPGW (SPGW2) PISTON SEAL

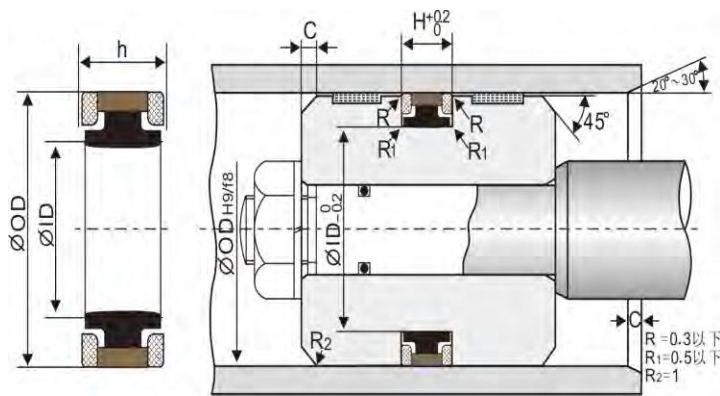

APPLICATION	
MATERIAL	PTFE+NY+NBR
TEMP.	-40°C~110°C
PRESSURE	500kgf/cm <sup>2</sup>
SPEED	1.5m/s

ITEM	OD	ID	h	H	C
* SPGW-220	220	197	15.5	16	6.5
SPGW-225	225	202	15.5	16	6.5
SPGW-230	230	207	15.5	16	6.5
* SPGW-240	240	217	15.5	16	6.5
SPGW-250	250	222	17.0	17.5	6.5
SPGW-260	260	232	17.0	17.5	7.5
* SPGW-270	270	242	17.0	17.5	7.5
SPGW-280	280	252	17.0	17.5	7.5
SPGW-300	300	272	17.0	17.5	7.5
SPGW-320	320	292	17.0	17.5	7.5
SPGW-330	330	302	17.0	17.5	7.5
SPGW-160	160	145	12.5	13	6.5
SPGW-170	170	155	17.0	17.5	6.5
SPGW-250	250	230	21.0	21.5	7.5