



# SPGI (KR) PISTON SEAL

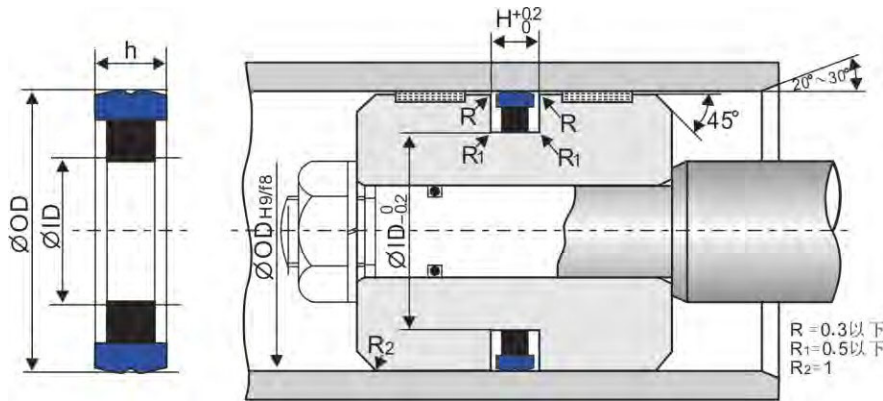

APPLICATION	
MATERIAL	PU+NBR
TEMP.	-30°C~110°C
PRESSURE	350kgf/cm <sup>2</sup>
SPEED	1.5m/s

ITEM	OD	ID	h	H
* SPGI-020	20	12.5	3.2	
SPGI-025	25	17.5	3.2	
* SPGI-030	30	22.5	3.2	
SPGI-032	32	24.5	3.2	
* SPGI-035	35	24	4.2	
SPGI-040	40	29	4.2	
* SPGI-040	40	30	4.3	4.5
* SPGI-040	40	24.5	6.3	
* SPGI-045	45	34	4.2	
SPGI-050	50	34.5	6.3	
SPGI-050	50	37	6.3	
SPGI-050	50	39	4.2	
* SPGI-050	50	40	4.3	4.5
* SPGI-050	50	34.5	6.3	
SPGI-055	55	39.5	6.3	
* SPGI-060	60	49	4.2	
* SPGI-060	60	44.5	6.3	
SPGI-063	63	52	4.2	
* SPGI-063	63	47.5	6.3	
* SPGI-063	63	50	6.3	
* SPGI-063	63	53	6.6	6.8
* SPGI-065	65	52	6.3	
* SPGI-065	65	54	6.3	
* SPGI-070	70	59	4.2	
SPGI-070	70	54.5	6.3	
* SPGI-070	70	57	6.3	
SPGI-070	70	55	7.3	
* SPGI-075	75	64	4.2	
* SPGI-075	75	59.5	6.3	
* SPGI-075	75	62	6.3	
SPGI-075	75	60	7.3	
SPGI-080	80	64.5	6.3	

# SPGI (KR) PISTON SEAL

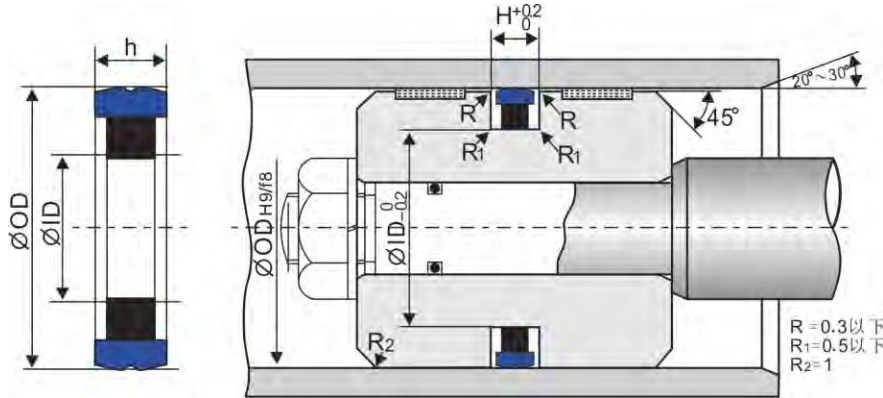

APPLICATION	
MATERIAL	PU+NBR
TEMP.	-30°C~110°C
PRESSURE	350kgf/cm <sup>2</sup>
SPEED	1.5m/s

ITEM	OD	ID	h	H
SPGI-080	80	66.5	6.3	
SPGI-080	80	65	7.3	
* SPGI-080	80	59	8.1	
SPGI-080	80	59	10.5	
* SPGI-085	85	59	6.3	
* SPGI-085	85	71.5	6.3	
SPGI-090	90	74.5	6.3	
* SPGI-090	90	69	8.1	
* SPGI-090	90	69	10.5	
SPGI-095	95	79.5	6.3	
* SPGI-100	100	84.5	6.3	
* SPGI-100	100	86.5	6.3	
SPGI-100	100	85	7.3	
* SPGI-100	100	79	8.1	
* SPGI-105	105	89.5	6.3	
SPGI-110	110	94.5	6.3	
SPGI-110	110	89	8.1	
* SPGI-110	110	89	10.5	
* SPGI-115	115	94	8.1	
* SPGI-120	120	104.5	6.3	
SPGI-120	120	99	10.5	
SPGI-125	125	109.5	6.3	
* SPGI-125	125	104	8.1	
* SPGI-125	125	104	10.5	
SPGI-140	140	119	10.5	
* SPGI-140	140	119	12.5	
* SPGI-150	150	129	8.1	
SPGI-150	150	129	10.5	
* SPGI-160	160	144	7.3	
* SPGI-160	160	139	8.1	
* SPGI-170	170	149	8.1	
* SPGI-180	180	159	8.1	
* SPGI-200	200	179	8.1	
* SPGI-200	200	175	12.5	
* SPGI-210	210	189	8.1	
* SPGI-210	210	189	8.1	