


# TKP PISTON SEAL

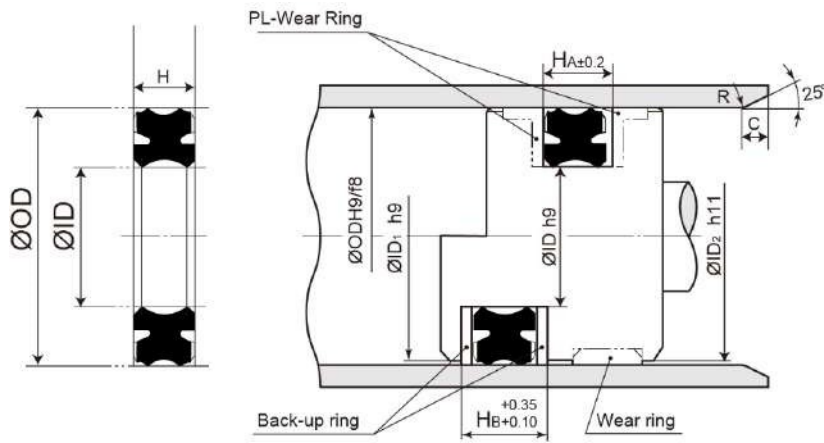

APPLICATION	
MATERIAL	NBR
TEMP.	-25°C~100°C
PRESSURE	140kgf/cm <sup>2</sup>
SPEED	1m/s

ITEM	OD	ID	h	D1	D2	HA	HB	C
TKP-040	40	30	6.5	39.5	38.5	7	11	2.5
TKP-045	45	35	6.5	44.5	43.5	7	11	2.5
TKP-050	50	40	6.5	49.5	48.5	7	11	2.5
TKP-055	55	45	6.5	54.4	53	7	11	2.5
TKP-060	60	50	6.5	59.4	58	7	11	2.5
TKP-063	63	53	6.5	62.4	61	7	11	2.5
TKP-065	65	55	6.5	64.4	63	7	12	2.5
TKP-070	70	60	6.5	69.4	68	7	12	2.5
TKP-075	75	65	6.5	74.4	73	7	12	2.5
TKP-080	80	67	8	79.4	78	8.5	13.5	3
TKP-085	85	72	8	84.4	83	8.5	13.5	3
TKP-090	90	77	8	89.4	88	8.5	13.5	3
TKP-095	95	82	8	94.4	93			
TKP-100	100	85	9	99.4	98	10	16	4