


HBY BUFFER SEAL

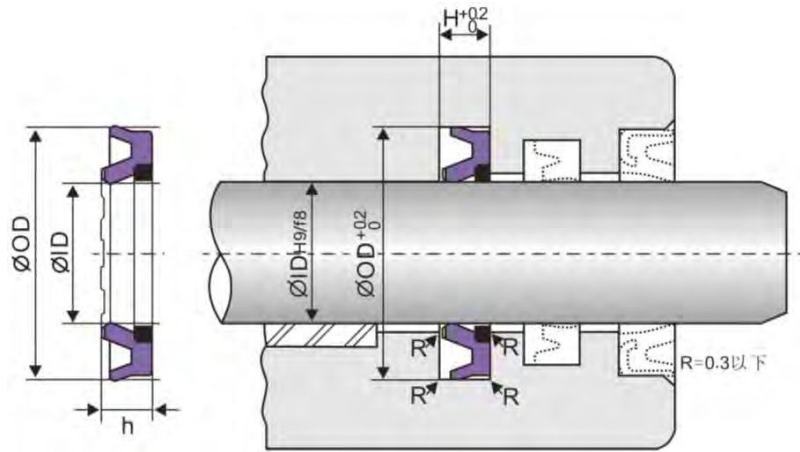

APPLICATION	
MATERIAL	PU+NY
TEMP.	-40°C~120°C
PRESSURE	400kgf/cm ²
SPEED	1m/s

ITEM	ID	OD	h	H
HBY-040	40	50.7	3.9	
HBY-045	45	55.7	3.9	
HBY-050	50	60.7	3.9	
HBY-055	55	65.7	3.9	
HBY-060	60	70.7	3.9	
HBY-040	40	55.5	6	6.3
HBY-045	45	60.5	6	6.3
HBY-050	50	65.5	6	6.3
HBY-055	55	70.5	6	6.3
HBY-056	56	71.5	6	6.3
HBY-060	60	75.5	6	6.3
HBY-063	63	78.5	6	6.3
HBY-065	65	80.5	6	6.3
HBY-070	70	85.5	6	6.3
HBY-075	75	90.5	6	6.3
HBY-080	80	95.5	6	6.3
HBY-085	85	100.5	6	6.3
HBY-090	90	105.5	6	6.3
HBY-095	95	110.5	6	6.3
HBY-100	100	115.5	6	6.3
HBY-105	105	120.5	6	6.3
HBY-110	110	125.5	6	6.3
HBY-115	115	130.5	6	6.3
HBY-120	120	135.5	6	6.3
HBY-130	130	145.5	6	6.3
HBY-135	135	150.5	6	6.3
HBY-140	140	155.5	6	6.3
HBY-145	145	160.5	6	6.3
HBY-150	150	165.5	6	6.3
HBY-155	155	170.5	6	6.3
HBY-160	160	175.5	6	6.3
HBY-170	170	185.5	6	6.3
HBY-180	180	195.5	6	6.3