


IUH ROD SEAL

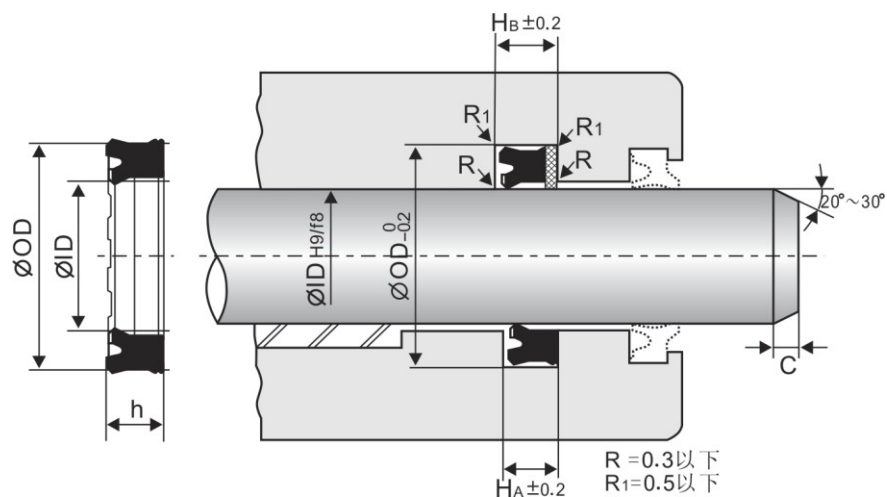


APPLICATION	
MATERIAL	PU
TEMP.	-40°C~120°C
PRESSURE	350kgf/cm ²
SPEED	1m/s

ITEM	ID	OD	h	HA	HB	C
IUH-040	40	50	7	8	11	3
IUH-045	45	55	7	8	11	3
IUH-050	50	63	10	11	14	3
IUH-055	55	68	10	11	14	3
IUH-060	60	73	10	11	14	3
IUH-065	65	78	10	11	14	3
IUH-070	70	83	10	11	14	4
IUH-075	75	88	10	11	14	4
IUH-080	80	93	10	11	14	4
IUH-085	85	100	10	11	14	4
IUH-090	90	105	10	11	14	4
IUH-095	95	110	10.5	11.5	14.5	4
IUH-100	100	115	10	11	14	4
IUH-110	110	130	10	11	14	4
IUH-120	120	140	10	11	14	4

APPLICATION	
MATERIAL	NBR
TEMP.	-35°C~110 °C
PRESSURE	210kgf/cm ²
SPEED	1.0 m/s

ITEM	ID	OD	h	HA	HB	C
IUH-080	80	93	10	11	14	4
IUH-085	85	100	10	11	14	4
IUH-095	95	110	10.5	11.5	14.5	4
IUH-100	100	115	10	11	14	4
IUH-110	110	130	10	11	14	4
IUH-120	120	140	10	11	14	4
IUH-140	140	160	12	13	16	6

KUH ROD SEAL

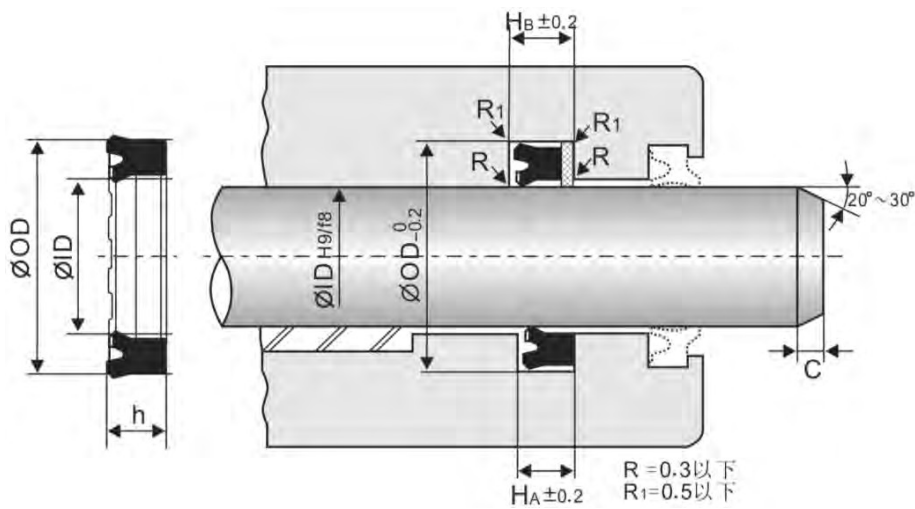

APPLICATION	
MATERIAL	PU
TEMP.	-40°C~120°C
PRESSURE	350kgf/cm ²
SPEED	1m/s

ITEM	ID	OD	h	H _A	H _B	C
KUH-065	65	80	9	10	13	4
KUH-070	70	85	9	10	13	4
KUH-075	75	90	9	10	13	4
KUH-080	80	95	9	10	13	4
KUH-085	85	100	9	10	13	4
KUH-090	90	105	9	10	13	4
KUH-095	95	110	9	10	13	4
KUH-100	100	115	9	10	13	4
KUH-105	105	120	9	10	13	4
KUH-110	110	125	9	10	13	4
KUH-115	115	130	9	10	13	4
KUH-130	130	145	9	10	13	4
KUH-085	85	105	12			
KUH-095	95	115	12			
KUH-100	100	120	12			
KUH-115	115	135	12			