



RS09B

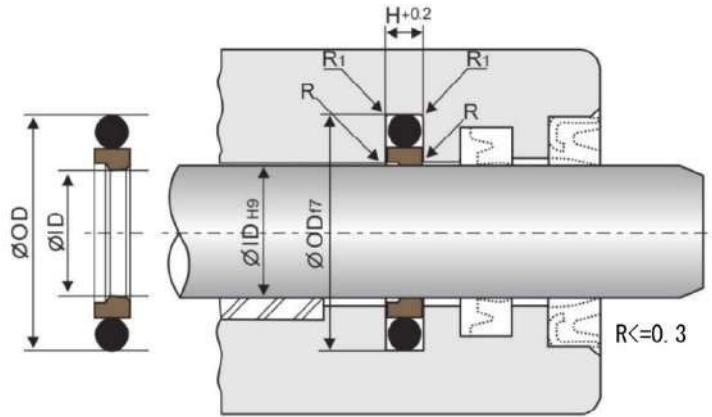

| APPLICATION | |
|-------------|------------------------|
| MATERIAL | PTFE+NBR |
| TEMP. | -35°C~105°C |
| PRESSURE | 600kgf/cm ² |
| SPEED | 5m/s |

| ITEM | ID | OD | H |
|-------------|----|------|-----|
| RS09B 004 | 4 | 8.9 | 2.2 |
| RS09B 006 | 6 | 10.9 | 2.2 |
| RS09B 012 | 12 | 16.9 | 2.2 |
| RS09B 016 | 16 | 20.9 | 2.2 |
| RS09B 010 | 10 | 17.3 | 3.2 |
| RS09B 012 | 12 | 19.3 | 3.2 |
| * RS09B 014 | 14 | 22 | 3.2 |
| RS09B 016 | 16 | 23.3 | 3.2 |
| * RS09B 016 | 16 | 24 | 3.2 |
| RS09B 018 | 18 | 25.3 | 3.2 |
| * RS09B 018 | 18 | 26 | 3.2 |
| RS09B 020 | 20 | 27.3 | 3.2 |
| RS09B 020 | 20 | 28 | 3.2 |
| RS09B 022 | 22 | 29.3 | 3.2 |
| RS09B 025 | 25 | 32.3 | 3.2 |
| RS09B 030 | 30 | 37.3 | 3.2 |
| RS09B 032 | 32 | 39.3 | 3.2 |
| RS09B 035 | 35 | 42.3 | 3.2 |
| RS09B 036 | 36 | 43.3 | 3.2 |
| RS09B 020 | 20 | 30.7 | 4.2 |
| RS09B 022 | 22 | 32.7 | 4.2 |
| RS09B 022 | 22 | 33 | 4.2 |
| RS09B 025 | 25 | 35.7 | 4.2 |
| RS09B 028 | 28 | 38.7 | 4.2 |
| RS09B 028 | 28 | 39 | 4.2 |
| RS09B 030 | 30 | 40 | 4.2 |
| RS09B 030 | 30 | 40.7 | 4.2 |
| RS09B 032 | 32 | 42.7 | 4.2 |
| RS09B 035 | 35 | 45 | 4.2 |
| RS09B 035 | 35 | 45.7 | 4.2 |
| RS09B 036 | 36 | 46.7 | 4.2 |
| RS09B 036 | 36 | 47 | 4.2 |
| RS09B 038 | 38 | 48.7 | 4.2 |
| RS09B 040 | 40 | 50.7 | 4.2 |
| RS09B 045 | 45 | 55.7 | 4.2 |
| RS09B 048 | 48 | 58.7 | 4.2 |


RS09B

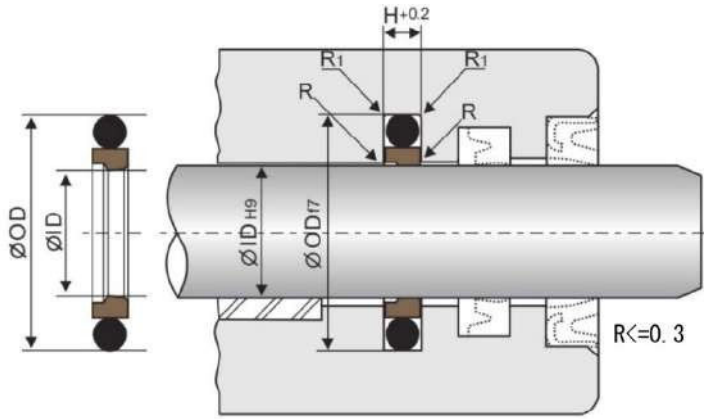

| APPLICATION | |
|-------------|------------------------|
| MATERIAL | PTFE+NBR |
| TEMP. | -35°C~105°C |
| PRESSURE | 600kgf/cm ² |
| SPEED | 5m/s |

| ITEM | ID | OD | H |
|-------------|----|-------|-----|
| * RS09B 050 | 50 | 60 | 4.2 |
| RS09B 050 | 50 | 60.7 | 4.2 |
| * RS09B 053 | 53 | 63 | 4.2 |
| RS09B 053 | 55 | 65 | 4.2 |
| RS09B 055 | 55 | 65.7 | 4.2 |
| RS09B 056 | 56 | 66.7 | 4.2 |
| RS09B 060 | 60 | 70.7 | 4.2 |
| RS09B 065 | 65 | 75 | 4.2 |
| * RS09B 070 | 70 | 80 | 4.2 |
| RS09B 070 | 70 | 80.7 | 4.2 |
| RS09B 075 | 75 | 85 | 4.2 |
| * RS09B 080 | 80 | 90 | 4.2 |
| RS09B 080 | 80 | 90.7 | 4.2 |
| RS09B 040 | 40 | 55.1 | 6.3 |
| RS09B 042 | 42 | 57.1 | 6.3 |
| RS09B 045 | 45 | 60.1 | 6.3 |
| RS09B 050 | 50 | 65.1 | 6.3 |
| RS09B 052 | 52 | 67.1 | 6.3 |
| RS09B 055 | 55 | 70.1 | 6.3 |
| RS09B 056 | 56 | 71.1 | 6.3 |
| RS09B 058 | 58 | 73.1 | 6.3 |
| RS09B 060 | 60 | 75.1 | 6.3 |
| RS09B 063 | 63 | 78.1 | 6.3 |
| RS09B 065 | 65 | 80.1 | 6.3 |
| RS09B 067 | 67 | 82.1 | 6.3 |
| RS09B 068 | 68 | 83.1 | 6.3 |
| RS09B 070 | 70 | 85.1 | 6.3 |
| RS09B 072 | 72 | 87.1 | 6.3 |
| RS09B 075 | 75 | 90.1 | 6.3 |
| RS09B 080 | 80 | 95.1 | 6.3 |
| RS09B 085 | 85 | 100.1 | 6.3 |
| RS09B 089 | 89 | 104.1 | 6.3 |
| RS09B 090 | 90 | 105.1 | 6.3 |
| RS09B 092 | 92 | 107.1 | 6.3 |
| RS09B 095 | 95 | 110.1 | 6.3 |
| RS09B 098 | 98 | 113.1 | 6.3 |


RS09B

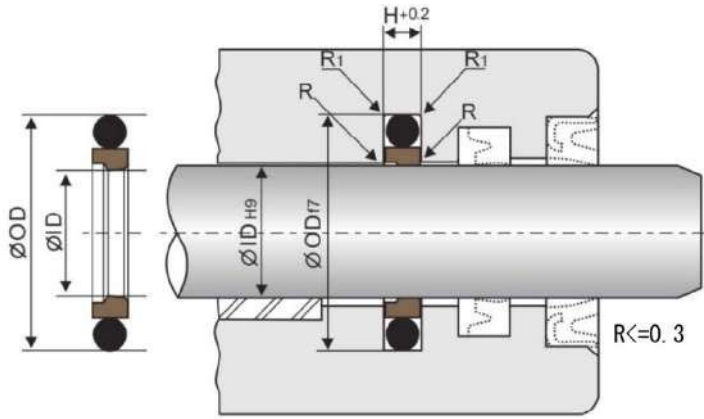

| APPLICATION | |
|-------------|------------------------|
| MATERIAL | PTFE+NBR |
| TEMP. | -35°C~105°C |
| PRESSURE | 600kgf/cm ² |
| SPEED | 5m/s |

| ITEM | ID | OD | H |
|-----------|-----|-------|-----|
| RS09B 100 | 100 | 115.1 | 6.3 |
| RS09B 105 | 105 | 120.1 | 6.3 |
| RS09B 110 | 110 | 125.1 | 6.3 |
| RS09B 115 | 115 | 130.1 | 6.3 |
| RS09B 118 | 118 | 133.1 | 6.3 |
| RS09B 118 | 118 | 133.5 | 6.3 |
| RS09B 120 | 120 | 135.1 | 6.3 |
| RS09B 125 | 125 | 140.1 | 6.3 |
| RS09B 130 | 130 | 145.1 | 6.3 |
| RS09B 132 | 132 | 147.1 | 6.3 |
| RS09B 133 | 133 | 148.1 | 6.3 |
| RS09B 135 | 135 | 150.1 | 6.3 |
| RS09B 136 | 136 | 151.1 | 6.3 |
| RS09B 138 | 138 | 153.1 | 6.3 |
| RS09B 140 | 140 | 155.1 | 6.3 |
| RS09B 145 | 145 | 160.1 | 6.3 |
| RS09B 147 | 147 | 162.1 | 6.3 |
| RS09B 150 | 150 | 165.1 | 6.3 |
| RS09B 155 | 155 | 170.1 | 6.3 |
| RS09B 157 | 157 | 172.1 | 6.3 |
| RS09B 160 | 160 | 175.1 | 6.3 |
| RS09B 165 | 165 | 180.1 | 6.3 |
| RS09B 170 | 170 | 185.1 | 6.3 |
| RS09B 175 | 175 | 190.1 | 6.3 |
| RS09B 177 | 177 | 192.1 | 6.3 |
| RS09B 180 | 180 | 195.1 | 6.3 |
| RS09B 185 | 185 | 200.1 | 6.3 |
| RS09B 190 | 190 | 205.1 | 6.3 |
| RS09B 195 | 195 | 210.1 | 6.3 |
| RS09B 080 | 80 | 100.5 | 8.1 |
| RS09B 085 | 85 | 105.5 | 8.1 |
| RS09B 095 | 95 | 115.5 | 8.1 |
| RS09B 105 | 105 | 125.5 | 8.1 |
| RS09B 110 | 110 | 130.5 | 8.1 |
| RS09B 130 | 130 | 150.5 | 8.1 |
| RS09B 180 | 180 | 200.5 | 8.1 |

RS09B

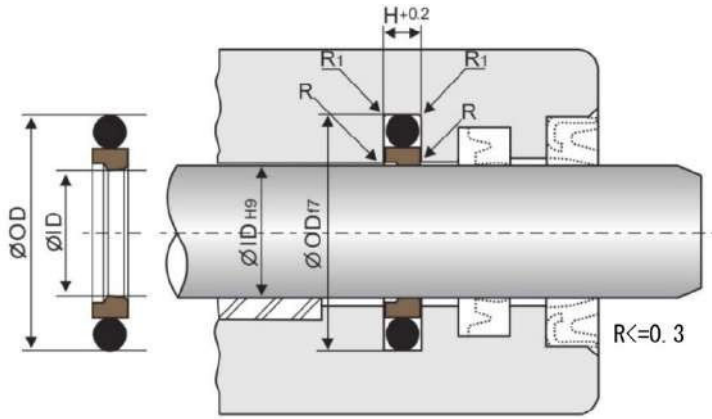

| APPLICATION | |
|-------------|------------------------|
| MATERIAL | PTFE+NBR |
| TEMP. | -35°C~105°C |
| PRESSURE | 600kgf/cm ² |
| SPEED | 5m/s |

| ITEM | ID | OD | H |
|-----------|-----|-------|-----|
| RS09B 185 | 185 | 205.5 | 8.1 |
| RS09B 200 | 200 | 220.5 | 8.1 |
| RS09B 205 | 205 | 225.5 | 8.1 |
| RS09B 210 | 210 | 230.5 | 8.1 |
| RS09B 220 | 220 | 240.5 | 8.1 |
| RS09B 230 | 230 | 250.5 | 8.1 |
| RS09B 250 | 250 | 270.5 | 8.1 |
| RS09B 270 | 270 | 294 | 8.1 |
| RS09B 280 | 280 | 304 | 8.1 |
| RS09B 300 | 300 | 324 | 8.1 |