


RUN ROD SEAL

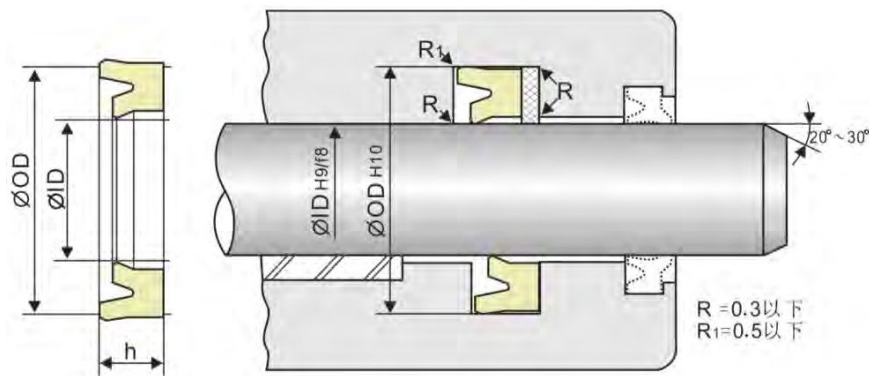

APPLICATION	
MATERIAL	PU
TEMP.	-40°C~120°C
PRESSURE	350kgf/cm ²
SPEED	1m/s

ITEM	ID	OD	h
* RUN-030	30	40	7
RUN-045	45	55	8
RUN-050	50	60	8
* RUN-065	65	75	8
RUN-120	120	135	9
RUN-135.8	135.8	150.9	9.6
RUN-030	30	43	10
RUN-050	50	63	10
RUN-055	55	68	10
RUN-060	60	73	10
RUN-060	60	75	10
RUN-060	60	76	10
RUN-065	65	78	10
RUN-070	70	83	10
RUN-070	70	85	10
RUN-075	75	88	10
RUN-080	80	93	10
RUN-080	80	95	10
* RUN-085	85	100	10
* RUN-090	90	105	10
* RUN-095	95	110	10
* RUN-100	100	115	10
RUN-105	105	120	10
* RUN-110	110	125	10
RUN-115	115	130	10
RUN-056	56	71	11.5
* RUN-035	35	50	12
RUN-055	55	71	12
RUN-065	65	80	12
* RUN-130	130	150	12
* RUN-140	140	160	12
RUN-160	160	180	12
RUN-120	120	140	13
* RUN-105	105	125	15
* RUN-130	130	150	16
* RUN-140	140	160	16
RUN-160	160	185	16