


UN PISTON & ROD SEAL

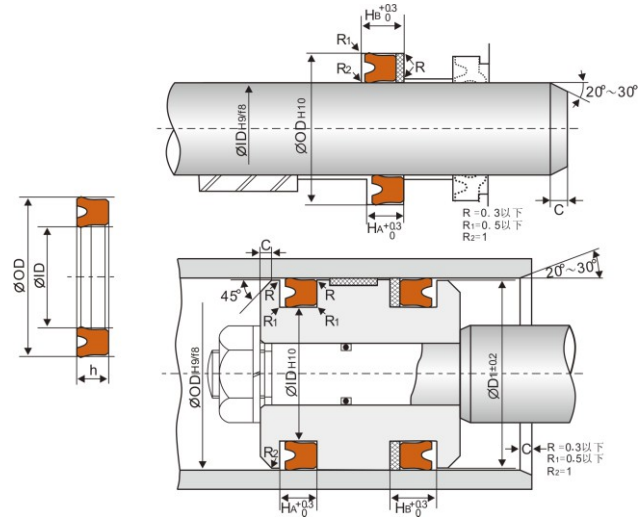

APPLICATION	
MATERIAL	PU
TEMP.	-35°C~100°C
PRESSURE	310kgf/cm ²
SPEED	1m/s