


# FI (HBI/BFR/BUR08/YR) BUFFER SEAL

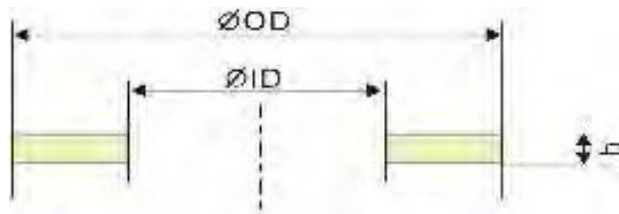

| APPLICATION |                        |
|-------------|------------------------|
| MATERIAL    | PU                     |
| TEMP.       | -40°C~100°C            |
| PRESSURE    | 350kgf/cm <sup>2</sup> |
| SPEED       | 1m/s                   |

| ITEM   | ID | OD | h   |
|--------|----|----|-----|
| FI-030 | 30 | 40 | 3   |
| FI-035 | 35 | 45 | 3   |
| FI-040 | 40 | 50 | 3   |
| FI-045 | 45 | 55 | 3   |
| FI-050 | 50 | 60 | 3   |
| FI-050 | 50 | 63 | 4   |
| FI-060 | 60 | 73 | 3   |
| FI-060 | 60 | 73 | 3.8 |
| FI-065 | 65 | 78 | 4   |
| FI-070 | 70 | 83 | 4   |
| FI-075 | 75 | 88 | 4   |
| FI-045 | 45 | 55 | 3   |
| FI-050 | 50 | 62 | 3.2 |
| FI-060 | 60 | 72 | 3.2 |
| FI-065 | 65 | 77 | 3.2 |