



# BACKUP RING BRT (BKS)

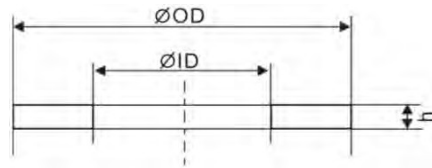

APPLICATION	
MATERIAL	PTFE
TEMP.	-55°C~200°C

ITEM	ID	OD	W	h	ITEM	ID	OD	W	h
BRT-003	3	6	1.5	1.25	BRT-036	36	42	3	1.25
BRT-004	4	7	1.5	1.25	BRT-038	38	44	3	1.25
BRT-005	5	8	1.5	1.25	BRT-039	39	45	3	1.25
BRT-006	6	9	1.5	1.25	BRT-040	40	46	3	1.25
BRT-007	7	10	1.5	1.25	BRT-041	41	47	3	1.25
BRT-008	8	11	1.5	1.25	BRT-042	42	48	3	1.25
BRT-009	9	12	1.5	1.25	BRT-044	44	50	3	1.25
BRT-010	10	13	1.5	1.25	BRT-045	45	51	3	1.25
BRT-010A	10	14	2	1.25	BRT-046	46	52	3	1.25
BRT-011	11	15	2	1.25	BRT-048	48	54	3	1.25
BRT-011.2	11.2	15.2	2	1.25	BRT-049	49	55	3	1.25
BRT-012	12	16	2	1.25	BRT-050	50	56	3	1.25
BRT-012.5	12.5	16.5	2	1.25	BRT-048	48	58	5	1.9
BRT-014	14	18	2	1.25	BRT-050A	50	60	5	1.9
BRT-015	15	19	2	1.25	BRT-052	52	62	5	1.9
BRT-016	16	20	2	1.25	BRT-053	53	63	5	1.9
BRT-017	17	21	2	1.25	BRT-055	55	65	5	1.9
BRT-018	18	22	2	1.25	BRT-056	56	66	5	1.9
BRT-020	20	24	2	1.25	BRT-058	58	68	5	1.9
BRT-021	21	25	2	1.25	BRT-060	60	70	5	1.9
BRT-022	22	26	2	1.25	BRT-062	62	72	5	1.9
BRT-022A	22	28	3	1.25	BRT-063	63	73	5	1.9
BRT-022.4	22.4	28.4	3	1.25	BRT-065	65	75	5	1.9
BRT-024	24	30	3	1.25	BRT-067	67	77	5	1.9
BRT-025	25	31	3	1.25	BRT-070	70	80	5	1.9
BRT-025.5	25.5	31.5	3	1.25	BRT-071	71	81	5	1.9
BRT-026	26	32	3	1.25	BRT-075	75	85	5	1.9
BRT-028	28	34	3	1.25	BRT-080	80	90	5	1.9
BRT-029	29	35	3	1.25	BRT-085	85	95	5	1.9
BRT-029.5	29.5	35.5	3	1.25	BRT-090	90	100	5	1.9
BRT-030	30	36	3	1.25	BRT-095	95	105	5	1.9
BRT-031	31	37	3	1.25	BRT-100	100	110	5	1.9
BRT-031.5	31.5	37.5	3	1.25	BRT-102	102	112	5	1.9
BRT-032	32	38	3	1.25	BRT-105	105	115	5	1.9
BRT-034	34	40	3	1.25	BRT-110	110	120	5	1.9
BRT-035	35	41	3	1.25	BRT-112	112	122	5	1.9
BRT-035.5	35.5	41.5	3	1.25	BRT-115	115	125	5	1.9

# BACKUP RING BRT (BKS)

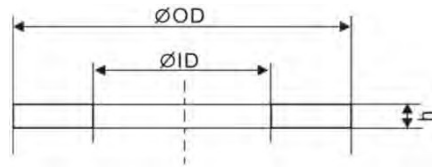

APPLICATION	
MATERIAL	PTFE
TEMP.	-55°C~200°C

ITEM	ID	OD	W	h	ITEM	ID	OD	W	h
BRT-120	120	130	5	1.9	BRT-230	230	245	7.5	2.75
BRT-125	125	135	5	1.9	BRT-235	235	250	7.5	2.75
BRT-130	130	140	5	1.9	BRT-240	240	255	7.5	2.75
BRT-132	132	142	5	1.9	BRT-245	245	260	7.5	2.75
BRT-135	135	145	5	1.9	BRT-250	250	265	7.5	2.75
BRT-140	140	150	5	1.9	BRT-255	255	270	7.5	2.75
BRT-145	145	155	5	1.9	BRT-260	260	275	7.5	2.75
BRT-150	150	160	5	1.9	BRT-265	265	280	7.5	2.75
BRT-150A	150	165	7.5	2.75	BRT-270	270	285	7.5	2.75
BRT-155	155	170	7.5	2.75	BRT-275	275	290	7.5	2.75
BRT-160	160	175	7.5	2.75	BRT-280	280	295	7.5	2.75
BRT-165	165	180	7.5	2.75	BRT-285	285	300	7.5	2.75
BRT-170	170	185	7.5	2.75	BRT-290	290	305	7.5	2.75
BRT-175	175	190	7.5	2.75	BRT-295	295	310	7.5	2.75
BRT-180	180	195	7.5	2.75	BRT-300	300	315	7.5	2.75
BRT-185	185	200	7.5	2.75	BRT-315	315	330	7.5	2.75
BRT-190	190	205	7.5	2.75	* BRT-320	320	335	7.5	2.75
BRT-195	195	210	7.5	2.75	* BRT-335	335	350	7.5	2.75
BRT-200	200	215	7.5	2.75	* BRT-340	340	355	7.5	2.75
BRT-205	205	220	7.5	2.75	* BRT-355	355	370	7.5	2.75
BRT-209	209	224	7.5	2.75	* BRT-360	360	375	7.5	2.75
BRT-210	210	225	7.5	2.75	BRT-375	375	390	7.5	2.75
BRT-215	215	230	7.5	2.75	* BRT-385	385	400	7.5	2.75
BRT-220	220	235	7.5	2.75	* BRT-400	400	415	7.5	2.75
BRT-225	225	240	7.5	2.75					