


GUARNIZIONI PER STELO – 616/M

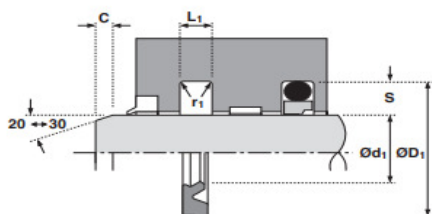

Materiale
POLIURETANO
Temperatura °C
da - 45° C a + 110° C
Velocità m/sec
1,0
Guarda online

Cod. Art.	Descrizione	Ød1	TOL f9	ØD1	TOL H11	SL	L1 +0.25 -0	PART No.
A richiesta		14	-0.016 -059	21,5	+0.13 +0.00	2.8	3.2	4577700†
A richiesta		18	-0.016 -059	25,5	+0.13 +0.00	2.8	3.2	4341800†
A richiesta		20	-0.020 -072	27,5	+0.13 +0.00	2.8	3.2	4721700†
A richiesta		20	-0.020 -072	31	+0.16 +0.00	3.9	4.2	4367400†
01.61600.022033	616/M D.022x033x3,9/4,2	22	-0.020 -072	33	+0.16 +0.00	3.9	4.2	4341900†
A richiesta		25	-0.020 -072	32.5	+0.16 +0.00	2.8	3.2	4721800†
01.61600.025036	616/M D.025x036x3,9/4,2	25	-0.020 -072	36	+0.16 +0.00	3.9	4.2	4367500†
A richiesta		25.4	-0.020 -072	32.9	+0.16 +0.00	2.8	3.2	4469000†
01.61600.028039	616/M D.028x039x3,9/4,2	28	-0.020 -072	39	+0.16 +0.00	3.9	4.2	4367600†
A richiesta		30	-0.020 -072	41	+0.16 +0.00	3.9	4.2	4404500
01.61600.032039	616/MD.032x039,5x3,2	32	-0.025 -087	39.5	+0.16 +0.00	2.8	3.2	4714800
01.61600.032043	616/M D.032x043x3,9/4,2	32	-0.025 -087	43	+0.16 +0.00	3.9	4.2	4367700†
01.61600.036047	616/M D.036x047x3,9/4,2	36	-0.025 -087	47	+0.16 +0.00	3.9	4.2	4353100†
01.61600.040051	616/M D.040x051x3,9/4,2	40	-0.025 -087	51	+0.19 +0.00	3.9	4.2	4722900†
A richiesta		40	-0.025 -087	55.5	+0.19 +0.00	6.0	6.3	4367800
01.61600.045056	616/M D.045x056x3,9/4,2	45	-0.025 -087	56	+0.19 +0.00	3.9	4.2	4556300†
A richiesta		45	-0.025 -087	60.5	+0.19 +0.00	6.0	6.3	4367900
A richiesta		50	-0.025 -087	61	+0.19 +0.00	3.9	4.2	4723000†
A richiesta		50	-0.025 -087	65.5	+0.19 +0.00	6.0	6.3	4368000
01.61600.056071	616/M D.056x071,5x6/6,3	56	+0.19 +0.00	71.5	+0.19 +0.00	6.0	6.3	4368100†
A richiesta		60	+0.19 +0.00	70.6	+0.19 +0.00	3.9	4.2	4410800
A richiesta		60	+0.19 +0.00	75.5	+0.19 +0.00	6.0	6.3	4727100
A richiesta		63	+0.19 +0.00	78.5	+0.19 +0.00	6.0	6.3	4368200†
A richiesta		65	+0.19 +0.00	76	+0.19 +0.00	4.2	4.2	4853300
A richiesta		65	+0.19 +0.00	80.5	+0.22 +0.00	6.0	6.3	4548000

A richiesta		70	+0.19 +0.00	85.5	+0.22 +0.00	6.0	6.3	4368300†
A richiesta		75	+0.19 +0.00	90.5	+0.22 +0.00	6.0	6.3	4728200
01.61600.080095	616/M D.080x095,5x6/6,3	80	+0.19 +0.00	95.5	+0.22 +0.00	6.0	6.3	4368400†
A richiesta		85	+0.19 +0.00	100.5	+0.22 +0.00	6.0	6.3	4538400
01.61600.090105	616/M D.090x105,5x6/6,3	90	+0.19 +0.00	105.5	+0.22 +0.00	6.0	6.3	4368500†
A richiesta		95	+0.19 +0.00	110.5	+0.22 +0.00	6.0	6.3	4538500
A richiesta		100	+0.19 +0.00	115.5	+0.22 +0.00	6.0	6.3	4368600†
A richiesta		110	+0.25 +0.00	125.5	+0.25 +0.00	6.0	6.3	4545400†
A richiesta		125	+0.25 +0.00	140.5	+0.25 +0.00	6.0	6.3	4545500†
A richiesta		130	+0.25 +0.00	145.5	+0.25 +0.00	6.0	6.3	4793900
A richiesta		140	+0.25 +0.00	155.5	+0.25 +0.00	6.0	6.3	4545600†
A richiesta		160	+0.25 +0.00	175.5	+0.25 +0.00	6.0	6.3	4548100†

